




ROHS Compliant

Date	2006/12/15
Revision	A

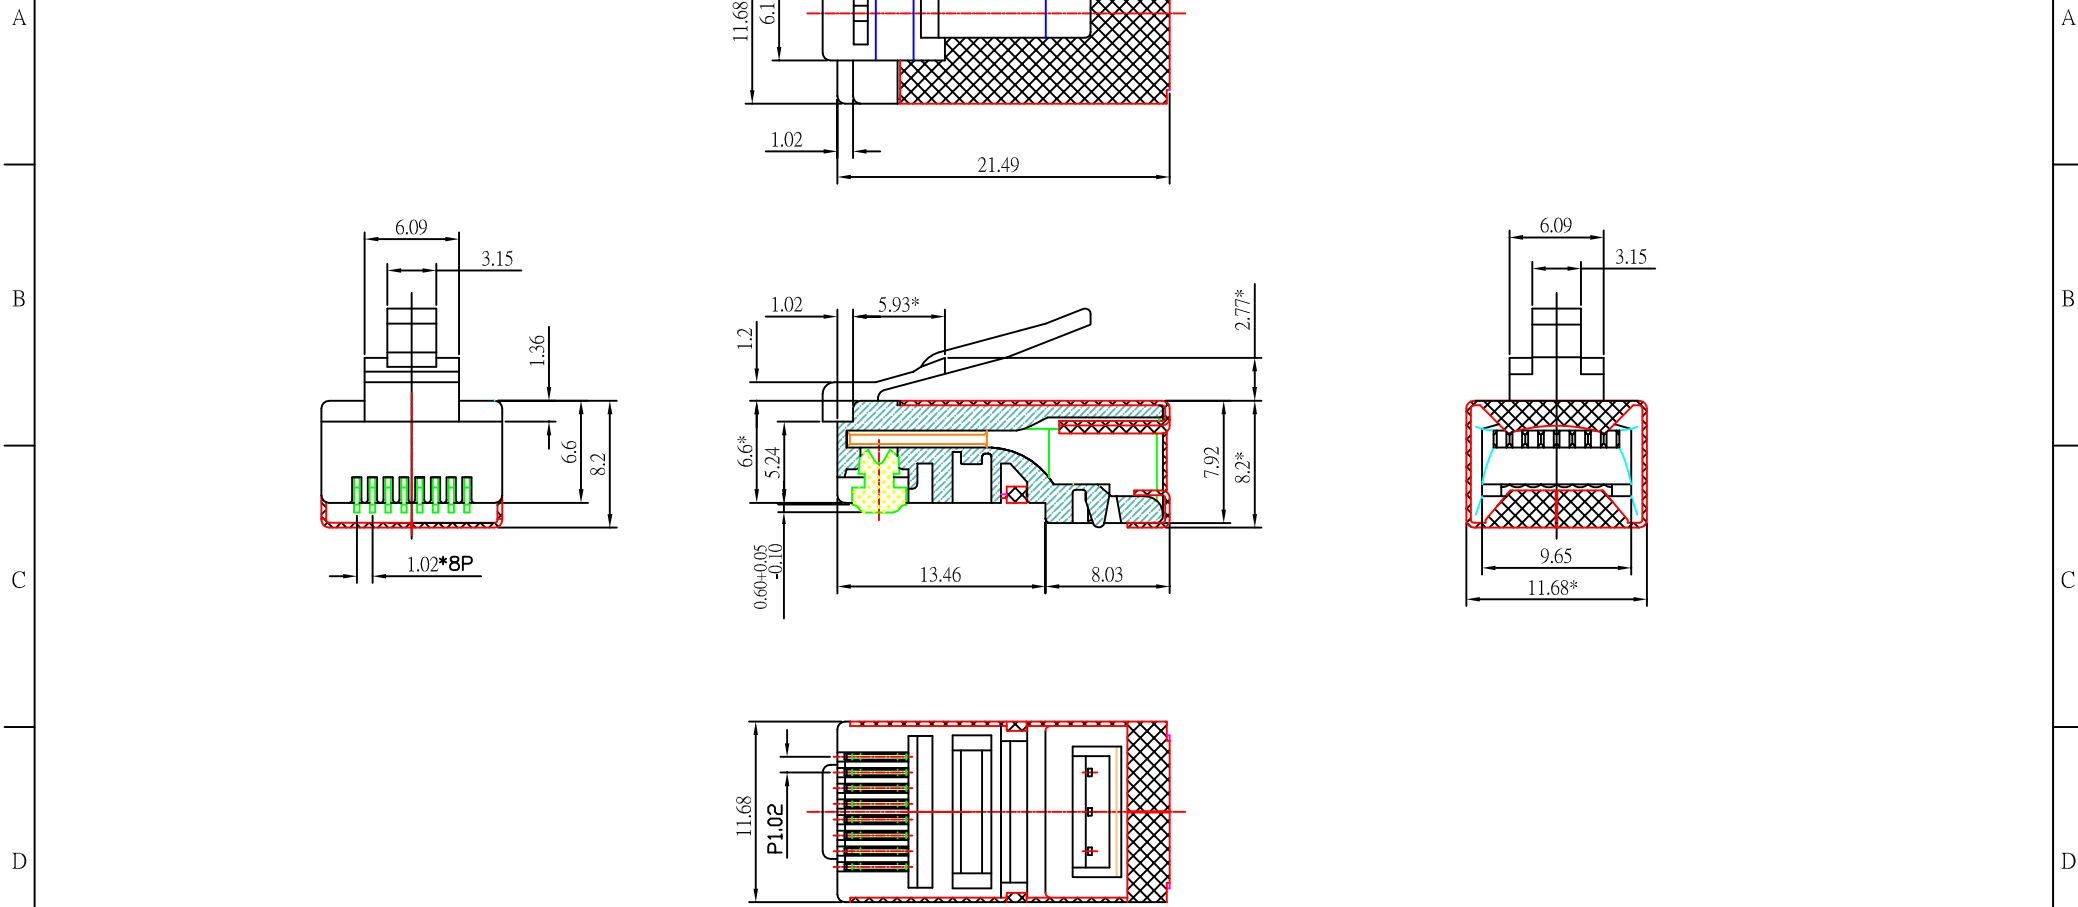

SPECIFICATION DATA				TOLERANCE	
HOUSING	POLYCARBONATE(PC), □UL94V-0 □UL94V-2			.XXXX	----
CONTACT	PHOSPHOR BRONZE FINE GOLD PLATED OVER NICKEL			.XXX	0.10
GOLD-PLATING	<input type="checkbox"/> 0.0762 um / 3u inch	<input type="checkbox"/> 0.15 um / 6u inch	<input type="checkbox"/> 0.38 um / 15u inch	.XX	0.25
	<input type="checkbox"/> 0.76 um / 30u inch	<input type="checkbox"/> 1.27 um / 50u inch		.X	0.38
TYPE OF PLUG	<input checked="" type="checkbox"/> SHIELDED		<input type="checkbox"/> UNSHIELDED	----	0.50
Insulation Resistance	500 MΩ	Dielectric Withstanding Voltage	500V AC		
Operating Temperature	-40~+125 °C	Durability	1000 cycles min.		
REV.	DESCRIPTION	ENG.	APPROVAL		

**P/NO. SY-MD8P8C SHIELDED**

ITEM MODULAR PLUG	CO. SY	S/N. SY-MD8P8C SHIELDED
DR. Pagi2006/12/15	APPD.	CHKD.
 Shiunn Yang Ent.Co.Ltd. TEL: 29089890 <REP> FAX: 29068849,29088679		FILE SY-RJ3-45-1
SCALE /		
UNIT mm	SIZE A4	