

Date	2005/12/01
Revision	A

A

A

B

B

C


C

D

D



E

E

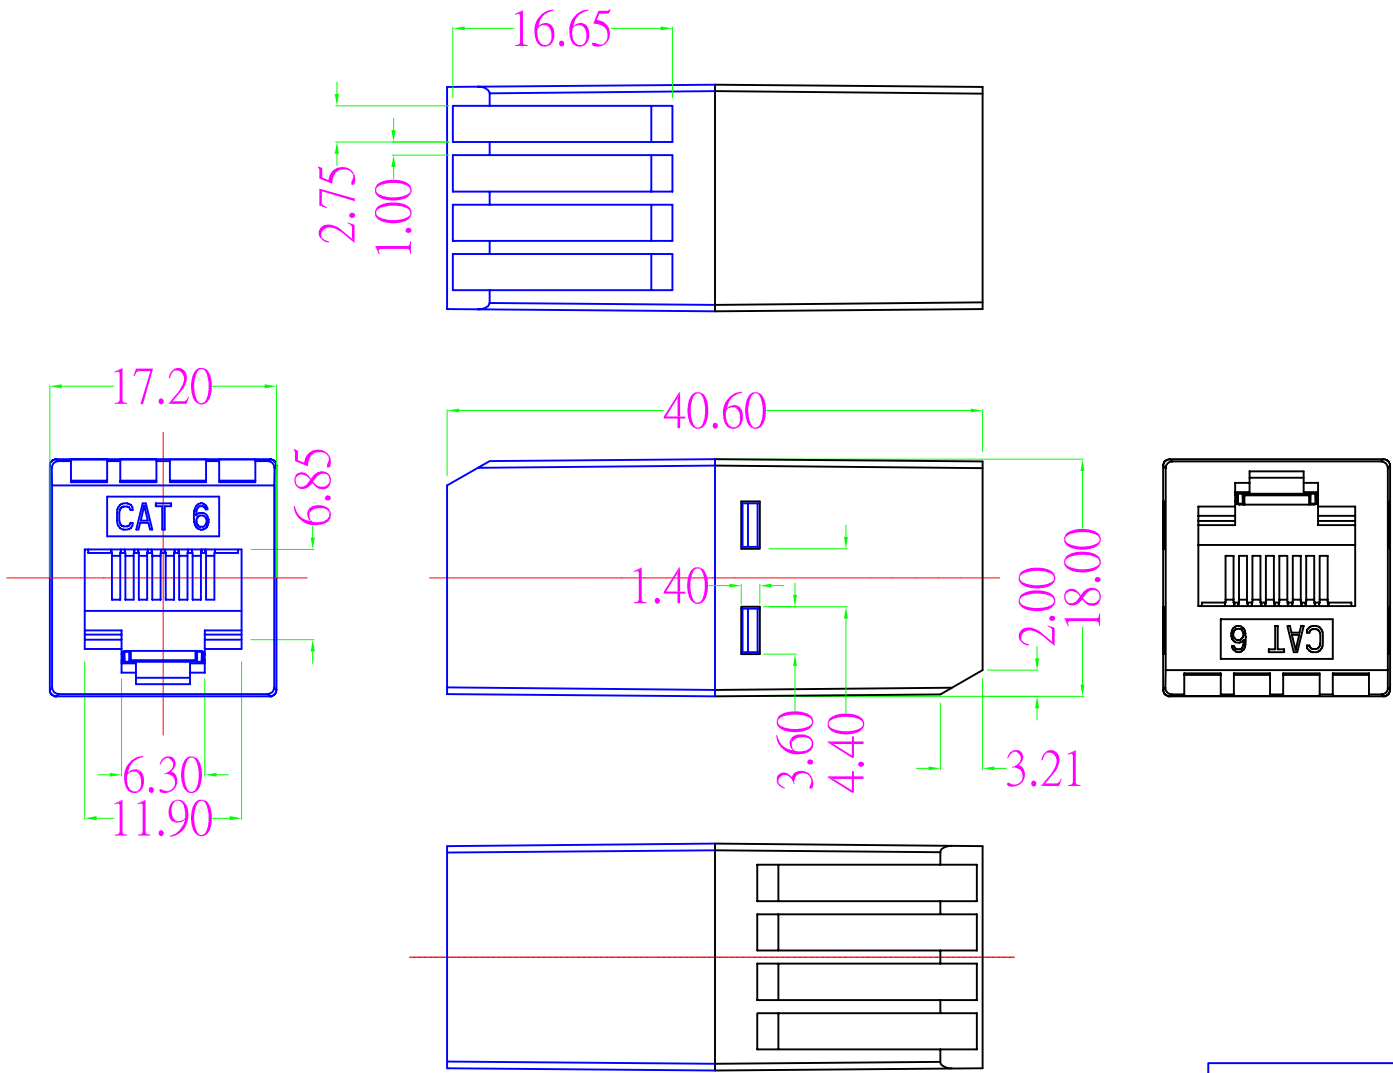

P/NO. SY350G8

SPECIFICATION			ANGLE	\perp
1	UL Applications	Max. 250VAC, 2Amp	301-500	± 0.25
2	Dielectrical with Standing Voltage	500VAC	121-300	± 0.2
3	Insulation Resistance	Min.500 M Ω	81-120	± 0.15
4	Termination Resistance (After Environmental Test)	Max. 35 m Ω	31-80	± 0.1
5	Material	PC+ABS UL94V0	11-30	± 0.07
6	RJ45 Jack Contact	Phosphor bronze, 50u" Gold Plating	1-10	± 0.05
7	Compliance	FCC Part 68	TOLERANCE	
REV.	DESCRIPTION	ENG.	APPROVAL	

ITEM. Inline Coupler	CO.	FILE. SY-350G8
DR. Rita 2005/12/01	APPD.	CHKD.
 Shiunn Yang Ent.Co.Ltd. TEL: 29089890 <REP> FAX: 29068849,29088679	SCALE /	
	UNIT mm	SIZE A4
	SHEET	REV.