

ROHS Compliant

Date	2009/10/07
Revision	B

A

A

B

B

C




C

D

D

E

E

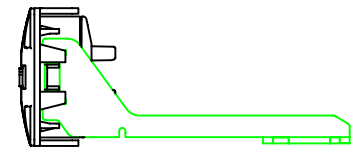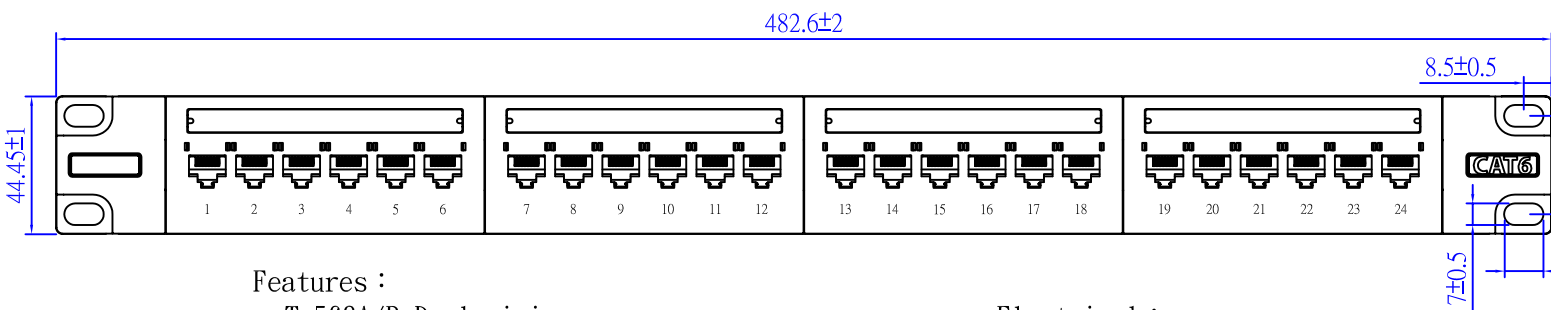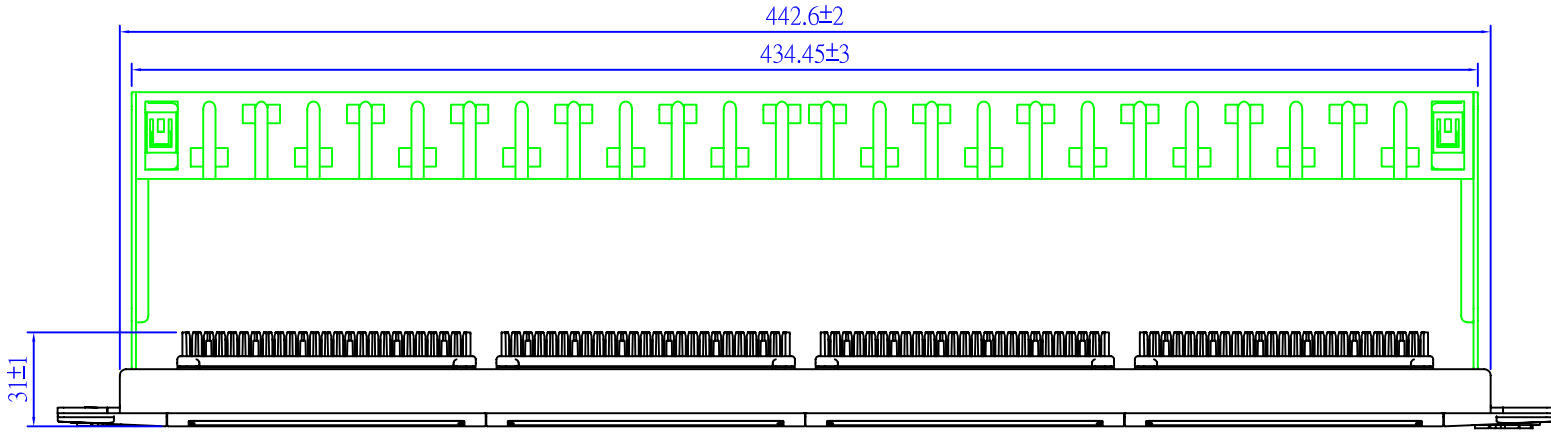

Features :

- T-568A/B Dual wiring
- RJ45 complies with FCC part 68 standard
- 110/Krone dual IDC connector compatible
- Provides termination for 22~26 AWG wire
- Jack insertion life >750 mating cycles
- IDC insertion life >250 mating cycles
- Operating temperature : -40 °C ~ +60 °C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max. 0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V

TOLERANCE	
.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

MATERIAL

CATEGORY	<input type="checkbox"/> CAT.5E <input checked="" type="checkbox"/> CAT.6 <input type="checkbox"/> CAT.3 <input type="checkbox"/> OTHER _____
FRAME	METALLIC SPCC + PC
IDC PLASTIC	PC, UL 94-V0
IDC CONTACT	PHOSPHOR BRONZE WITH 200U" TIN OVER NICKEL
CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	<input type="checkbox"/> 0.0762 um / 3u inch <input type="checkbox"/> 0.15 um / 6u inch <input type="checkbox"/> 0.38 um / 15u inch <input type="checkbox"/> 0.76 um / 30u inch <input checked="" type="checkbox"/> 1.27 um / 50u inch
TYPE OF PRODUCT	<input checked="" type="checkbox"/> UNSHIELD <input type="checkbox"/> SHIELD : STAINLESS COVER
ACCESSORIES	DUST COVER X 24PCS, CABLE TIES(80mm) X 24PCS, MANUAL X 1PCS

P/NO. SY-508-24PCB-W

TITLE. PANEL	CO. SY	FILE. SY-508-24PCB-W
DR. Breaker2009/05/21	APPD.	CHKD.



Shiunn Yang Ent.Co.Ltd.
 TEL: 29089890 <REP>
 FAX: 29068849,29088679

SCALE 1/1	
UNIT mm	SIZE A4
SHEET	REV.