


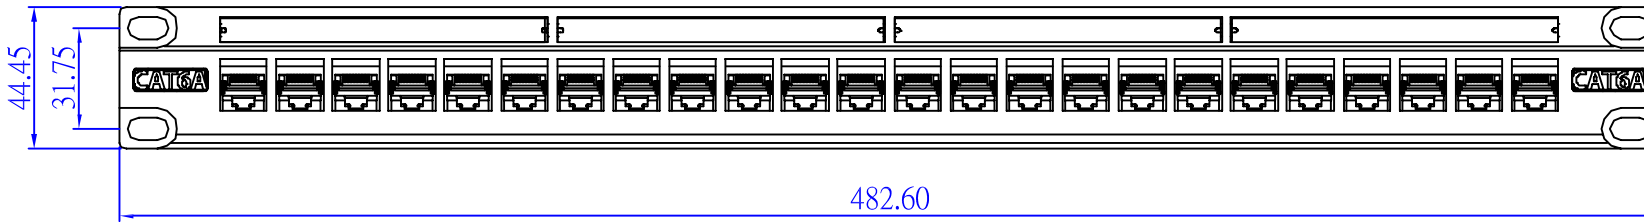


ROHS Compliant

Date	2009/06/05
Revision	A

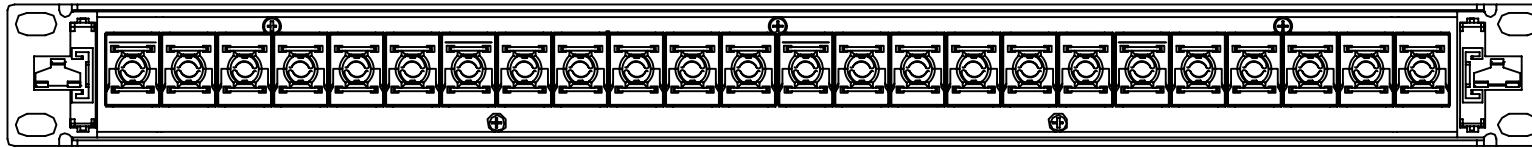

SY-504S-10G

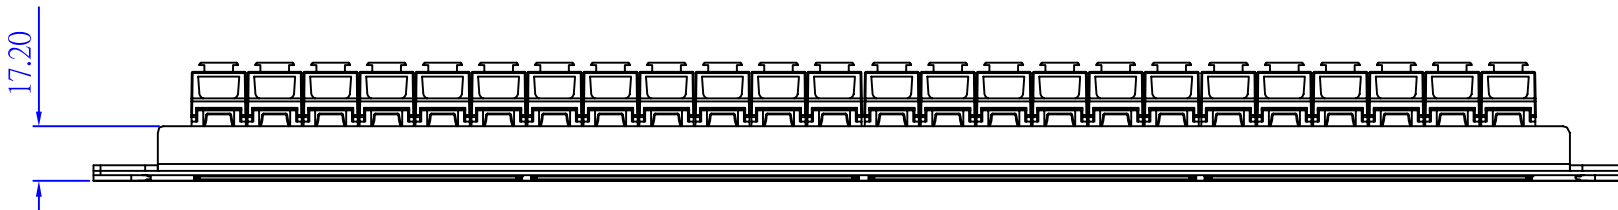

Features :

- T-568A/B Dual wiring
- RJ45 complies with FCC part 68 standard
- Tool less connector
- Provides termination for 22~26 AWG wire
- Jack insertion life >750 mating cycles
- IDC insertion life >250 mating cycles
- Operating temperature : -40°C~+60°C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max.0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V
- Voltage : 150V

TOLERANCE	
.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

MATERIAL

CATEGORY	<input type="checkbox"/> CAT.5E <input type="checkbox"/> CAT.6 <input type="checkbox"/> CAT.3 <input checked="" type="checkbox"/> OTHER <u>CAT.6A</u>
FRAME	METALLIC SPCC
IDC PLASTIC	PC, UL 94-V0
IDC CONTACT	PHOSPHOR BRONZE WITH 200U" TIN OVER NICKEL
CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	<input type="checkbox"/> 0.0762 um / 3u inch <input type="checkbox"/> 0.15 um / 6u inch <input type="checkbox"/> 0.38 um / 15u inch <input type="checkbox"/> 0.76 um / 30u inch <input checked="" type="checkbox"/> 1.27 um / 50u inch
TYPE OF PRODUCT	<input type="checkbox"/> UNSHIELD <input checked="" type="checkbox"/> SHIELD : STAINLESS COVER

P/NO. SY508S-24K-10G

TITLE. PANEL	CO. SY	FILE.SY508S-24K-10G
DR. Breaker2009/06/05	APPD.	CHKD.



Shiunn Yang Ent.Co.Ltd.
 TEL: 29089890 <REP>
 FAX: 29068849,29088679

SCALE 1/1	
UNIT mm	SIZE A4
SHEET	REV.