
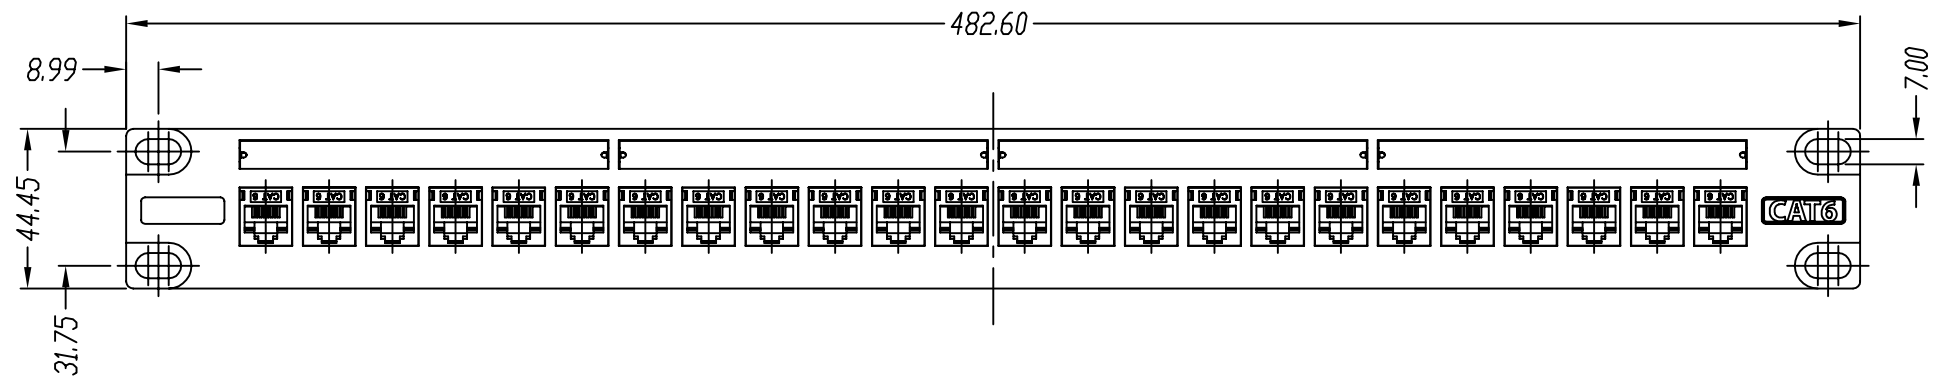


| | |
|----------|------------|
| Date | 2006/08/30 |
| Revision | A |

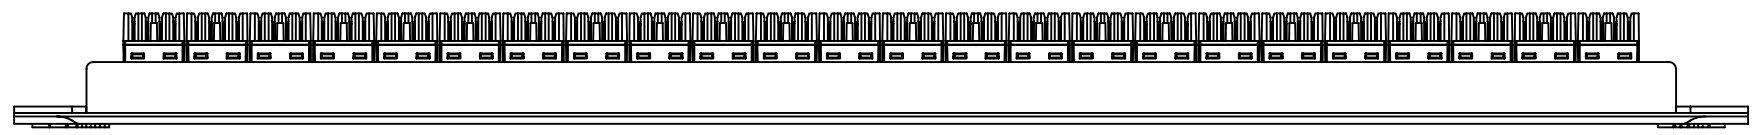

| MATERIAL | ELECTRICAL | TOLERANCE | |
|--|---|-----------|------|
| Metal Frame: SPCC | Current rating: 1.5 A | . XXXX | ---- |
| IDC plastic: PC, UL 94V-0 | Voltage: 150V | . XXX | 0.10 |
| IDC contact: Phosphor Bronze with 200u" Tin over | Insulation resistance: 500 MOhm | . XX | 0.25 |
| Spring Wire: Phosphor Bronze with 50u" Gold over | Contact resistance: 20 mOhm | . X | 0.38 |
| 100u" Nickel undercoat | DC resistanc: 0.1 Ohm | | |
| Temperature: -40° C ~ 68° C | Dielectric withstanding voltage: 1000 V | | |
| Humidity: 10% ~ 90%RH | | | |
| Modular jack:750 mating cycles | | | |
| Idc block:200 termination cycles | | | |

P/NO. SY508-24K-C6

| | | |
|----------------------|--------|--------------------|
| TITLE Patch Panel | CO. SY | FLIE. SY508-24K-C6 |
| DR. Hansum2006/08/30 | APPD. | CHKD. |



Shiunn Yang Ent.Co.Ltd.
 TEL: 29089890 <REP>
 FAX: 29068849,29088679

| | |
|-----------|---------|
| SCALE 1/1 | |
| UNIT mm | SIZE A4 |
| SHEET | REV. |

| REV. | DESCRIPTION | ENG. | APPROVAL |
|------|-------------|------|----------|
|------|-------------|------|----------|

1 2 3 4 5 6 7