

ROHS Compliant


DATE	2012/04/26
Revision	A

FEATURES :

- PROVIDES TERMINATION FOR 22~26 AWG WIRE
- JACK INSERTION LIFE >750 MATING CYCLES
- IDC INSERTION LIFE >250 MATING CYCLES
- OPERATING TEMPERATURE : -40°C ~ +60°C

ELECTRICAL :

- CONTACT RESISTANCE : 20M OHM
- DC CURRENT RATING : 1.5AMPS
- DC RESISTANCE : MAX.0.1 OHM
- INSULATION RESISTANCE : 500M OHM
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V

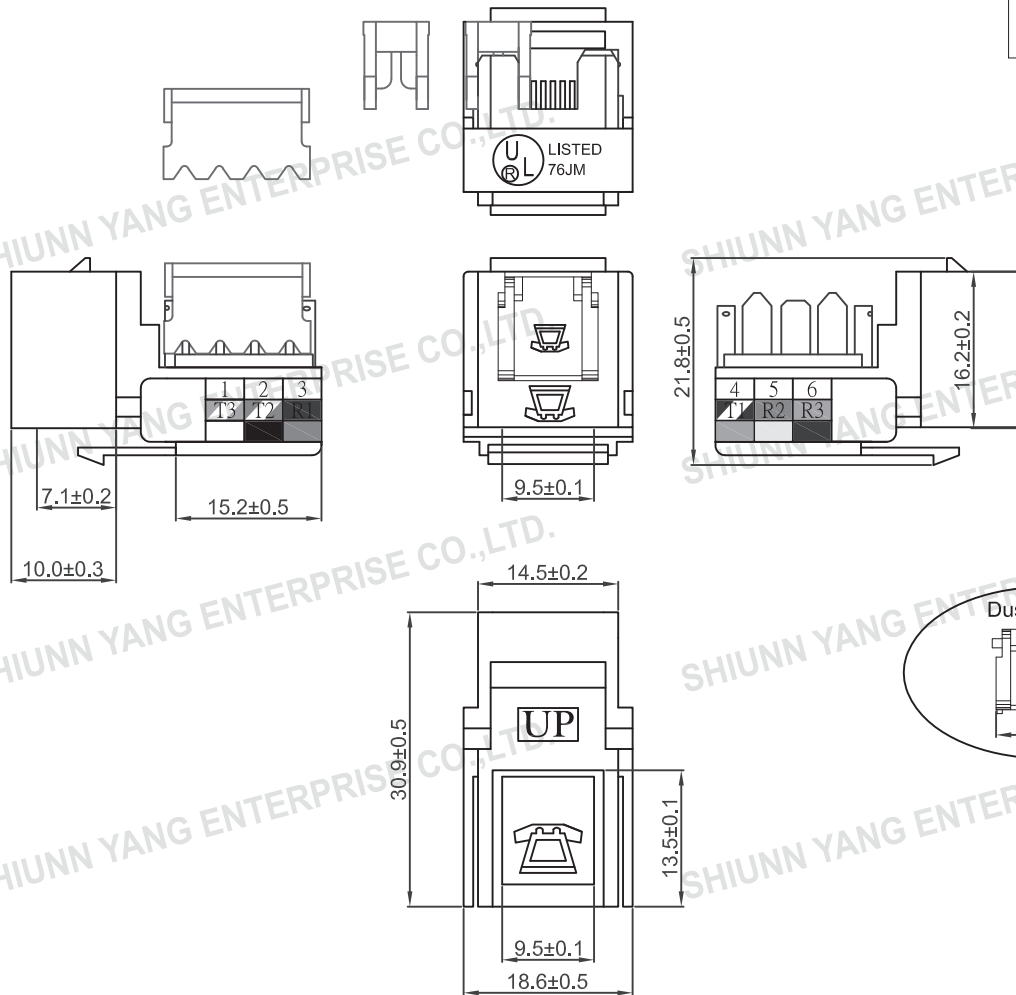

TOLERANCE

.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

MATERIAL

CATEGORY	<input type="checkbox"/> CAT.5E <input type="checkbox"/> CAT.6 <input checked="" type="checkbox"/> CAT.3 <input type="checkbox"/> OTHER _____
HOUSING	ABS UL94V-0
CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	<input type="checkbox"/> 0.0762um/3u inch <input type="checkbox"/> 0.15um/6u inch <input type="checkbox"/> 0.38um/15u inch <input type="checkbox"/> 0.76um/30u inch <input type="checkbox"/> 1.27um/50u inch
COLOR	<input type="checkbox"/> WHITE <input type="checkbox"/> BLACK <input type="checkbox"/> GREEN <input type="checkbox"/> BLUE <input type="checkbox"/> YELLOW <input type="checkbox"/> RED <input type="checkbox"/> ORANGE <input type="checkbox"/> IVORY <input type="checkbox"/> OTHER _____
TYPE OF PRODUCT	<input checked="" type="checkbox"/> UNSHIELD <input type="checkbox"/> SHIELD : 0.25mm THICKNESS COPPER ALLOY WITH NICKLE PLATED.

P/NO. SY-505-6C-XX

ITEM.	CO. SY	S/N. SY-505-6C-XX
DR. Wakka 2012/04/26	APPD.	CHKD.



Shiunn Yang Ent.Co.Ltd.  
TEL: 29089890 <REP>  
FAX: 29068849,29088679

FILE. SY-505-6C-XX
SCALE /
UNIT mm SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------

1 2 3 4 5 6 7