


ROHS Compliant

DATE	2023/04/10
Revision	B

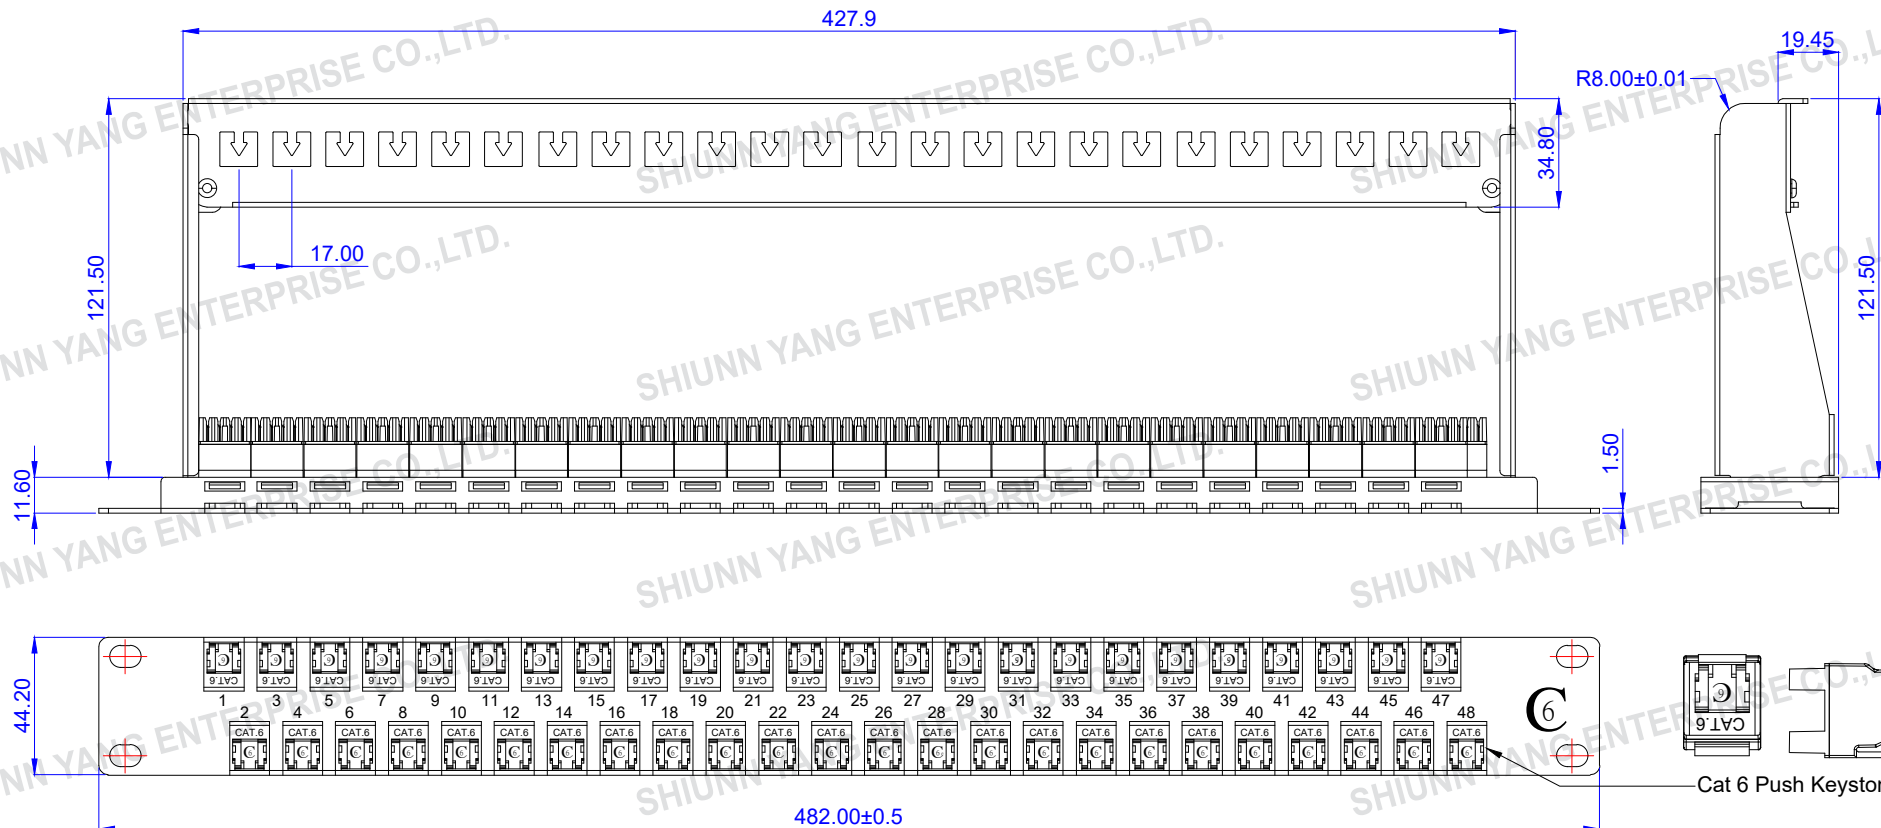


- Features :**
- T-568A/B Dual wiring
 - RJ45 complies with FCC part 68 standard
 - 110/Krone dual IDC connector compatible
 - Provides termination for 22~26 AWG wire
 - Jack insertion life >750 mating cycles
 - IDC insertion life >250 mating cycles
 - Operating temperature : -40°C~+60°C

- Electrical :**
- Contact resistance : 20m ohm
 - DC Current rating : 1.5Amps
 - DC resistance : Max.0.1 ohm
 - Insulation Resistance : 500m ohm
 - Dielectric withstanding voltage : 1000V

TOLERANCE	
.XXX	0.10
.XX	0.25
.X	0.38

MATERIAL	
Patch Panel	SPCC
Cable Management	SPCC
Keystone Housing	ABS UL94V-0
Contact	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL 1.27um/50u inch

P/NO. SY-508-48K-C6P-1UM		
ITEM.	CO. SY	S/N. SY-508-48K-C6P-1UM
DR.	APPD. Sweet 2023/04/10	CHKD.
 <p>Shiunn Yang Ent.Co.Ltd. TEL: 29089890 <REP> FAX: 29088679</p>	FILE. SY-508-48K-C6P-1UM	
	SCALE /	
	UNIT mm	SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
1			