




ROHS Compliant

Date	2023/11/10
Revision	A

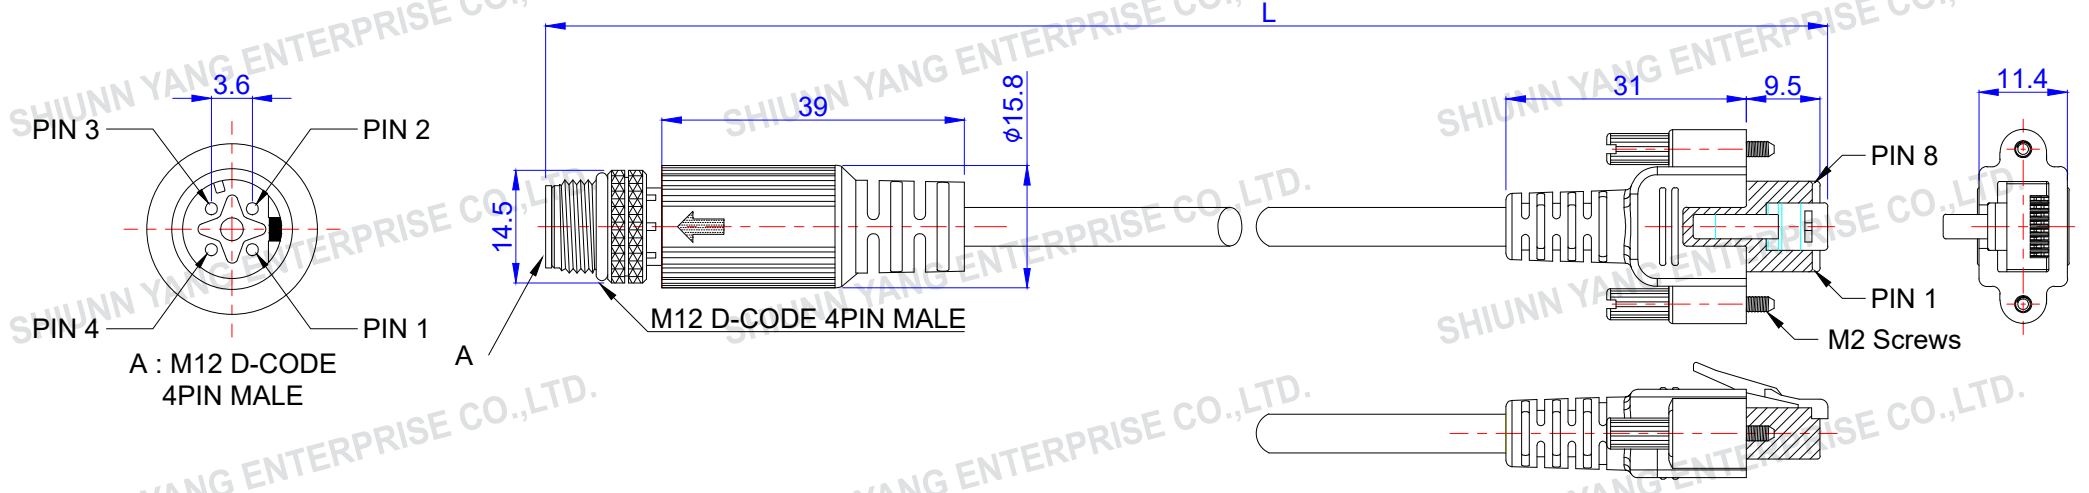

ELECTRICAL SPECIFICATION :
 RATED CURRENT : 5A
 RATED VOLTAGE : 125V
 WATER PROOF : IPX7

ENVIRONMENTAL :
 INSTALLATION TEMPERATURE 0°C~50°C
 STORAGE TEMPERATURE -20°C~75°C
 OPERATION TEMPERATURE -10°C~60°C

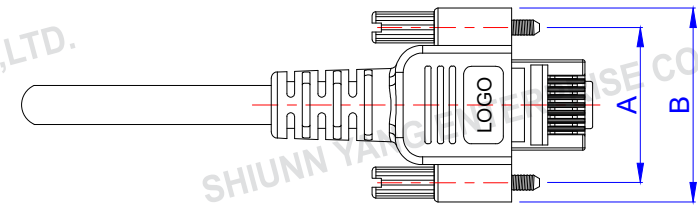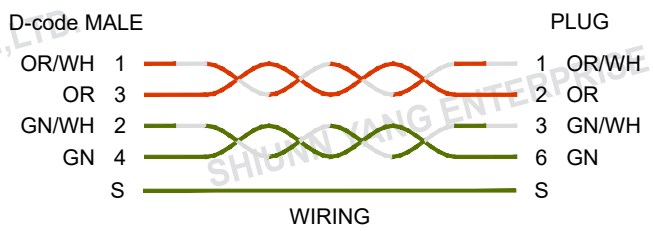

TOLERANCE	
.XXX	0.10
.XX	0.25
.X	0.38


A	B
20 mm	25 mm
25 mm	30 mm
27 mm	33 mm


TECHNICAL DATA

CABLE	FTP CAT.5e 4P 26AWG STRANDED CABLE BLACK IN CMX PVC OUTDOOR JACKET		
M12 D-code MALE	MOLDED HOOD: PVC 60% BLACK		
	HOUSING: PBT UL94V-0 BLACK ; CONTACT : BRASS ; NUT : BRASS ; O-RING : EPDM BLACK ; SHELL : BRASS		
	FINISH: CONTACT COLD 10u" ; UNDER PLATE: NICKED ; NUT: NICKED NI PLATED ; SHELL: BRIGHT TIN PLATED		
PLUG	FTP 8P8C 50u" ; SR : PVC		
HOOD	PVC 50P, UL94V-0 ; DUSTPROOF CAP : PVC ; SCREW : PBT+GF, UL94V-0 ; O-RING : NBR RVBBER		
M2 Screws	R- 4 x 21.6 mm 直花 (-) #M2細牙 鐵鍍鎳, 長桿螺絲.		
REV.	DESCRIPTION	ENG.	APPROVAL

P/NO. M12D-MXXP-XX-FPCe

ITEM. M12 D-code	CO. SY	FILE. M12D-MXXP-XX-FPCe
DR.	APPD. Sweet 2023/11/10	CHKD.


Shiunn Yang Ent.Co.Ltd.
 TEL: 29089890 <REP>
 FAX: 29088679

S/N. M12D-MXXP-XX-FPCe
SCALE / 
UNIT mm SIZE A4