



ROHS Compliant

Date	2023/10/05
Revision	A

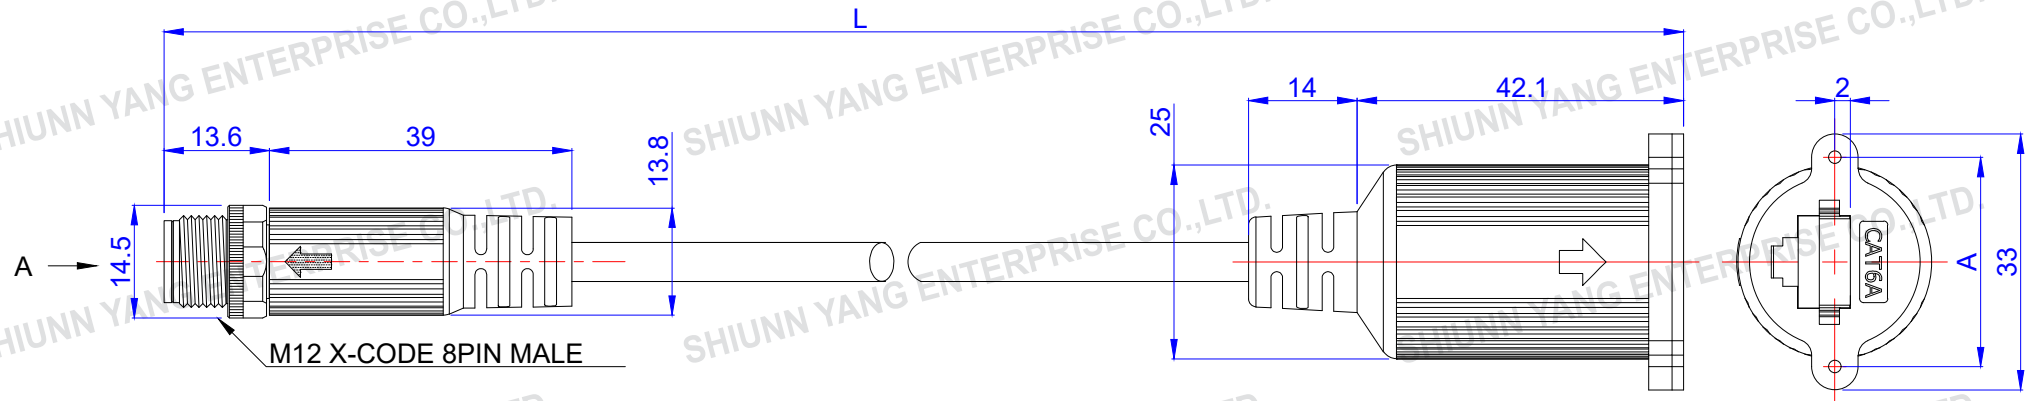

ELECTR SPECIFICATION:
 RATED CURRENT : 0.5A
 RATED VOLTAGE : 48V
 WATER PROOD : IP67

ENVIRONMENTAL :
 INSTALLATION TEMPERATURE 0°C~ 60°C
 STORAGE TEMPERATURE -40°C~ 90°C
 OPERATION TEMPERATURE -20°C~70°C

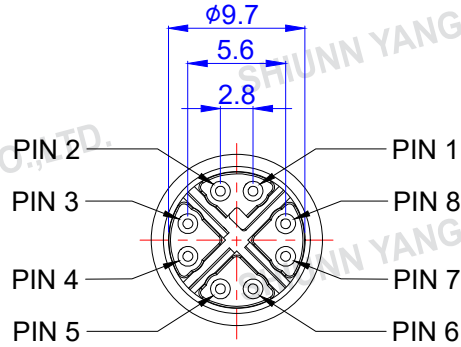

A : M12 X-CODE 8PIN MALE

X-CODE MALE

- OR/WH 1
- OR 2
- GN/WH 3
- GN 4
- BR/WH 5
- BR 6
- BL/WH 7
- BL 8
- S

HOUSING

- 1 OR/WH
- 2 OR
- 3 GN/WH
- 6 GN
- 7 BR/WH
- 8 BR
- 5 BL/WH
- 4 BL
- S

WIRING

TOLERANCE

.XXX	0.10
.XX	0.25
.X	0.38

A

20 mm
25 mm
27 mm

TECHNICAL DATA

CABLE S/FTP CAT6A 4P 26AWG STRANDED CABLE BLACK IN TPU JACKET

M12 X-CODE MALE

MOLDED HOOD: PVC 60% BLACK, IP67, 10u"
 HOUSING:PBT UL94V-0 BLACK ; CONTACT:BRASS ; NUT:BRASS ; SHELL:Zn ALLOY ; BACK SHELL:BRASS
 FINISH : CONTACT:10 MICRO INCHES MIN.GOLD PLATED ; UNDER PLATE:NICKEL ; NUT:NICKEL PLATED
 SHELL:NICKEL PLATED ; BACK SHELL:NICKEL PLATED

HOUSING PVC BLACK

A : 20mm 25mm 27mm

P/NO. M12X-MXXJ-XX-SF6A

ITEM. M12 X-code	CO. SY	FILE. M12X-MXXJ-XX-SF6A
DR.	APPD. Sweet 2023/10/05	CHKD.



Shiunn Yang Ent.Co.Ltd.
 TEL: 29089890 <REP>
 FAX: 29088679

S/N. M12X-MXXJ-XX-SF6A
SCALE /
UNIT mm SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------