


ROHS Compliant


DATE	2024/10/23
Revision	E

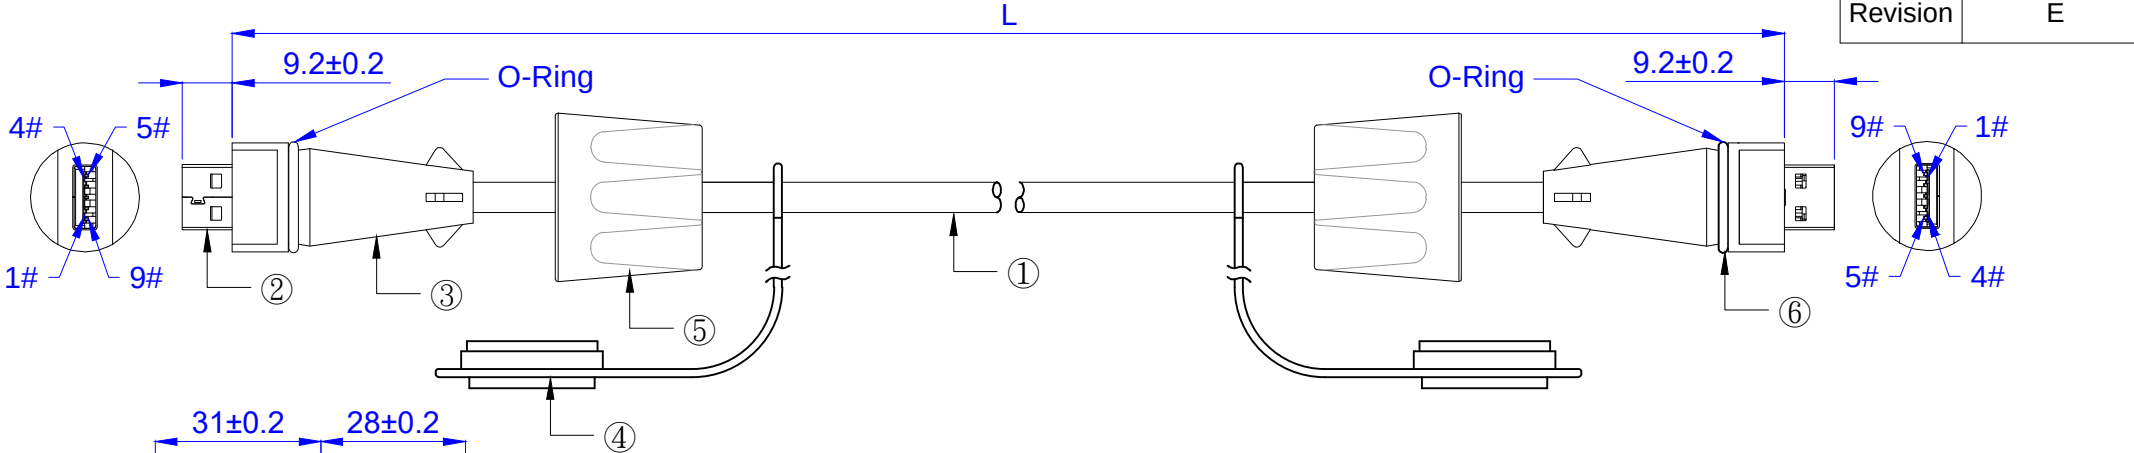

CONNECTION

USB 3.0 A/P

USB 3.0 A/P

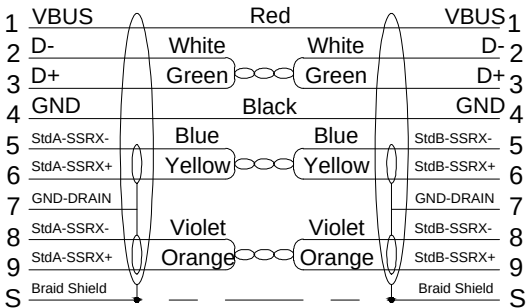

ELECTRIC TESTING :
100% OPEN & SHORT TESTING.
INULATION RESISTANCE : 20 MΩ.
CONDUCTOR RESISTANCE : 3Ω.
VOLTAGE : 300V DC/0.1S.

IP68
ACCORDING TO IEC 60529
Degrees of Protection Provided by Enclosures
6:Dust-tight
8:Protected from immersion in water for 60 minutes
at a depth of 1.5 meter.

MATERIAL

①	CABLE SPEC	UL2725 [(7/0.14Bc+HDPE)*1P+7/0.127Tc+Al/Mylar]*2+(7/0.127Bc+HDPE)*1P+7/0.25Bc+HDPE)*2C+Cotton+Al/Mylar+16/8/0.10Bc 65%]*1C OD=6.2±0.15mm Out Jacket:BLACK PVC
	PRINTED WHITE	CTi wire &cable SUPER SPEED USB 3.0 UL (Logo) AWM 2725 80°C 30V E81280-D CHING TAI(307085A01B00000)
②	USB	USB A Type (REV. 3.0)-NICKEL PLATED *2
③	HOOD	PVC ,BLACK UL94V-0 (Operating Temperature Range -40°C to 85°C)
④	DUSTPROOF CAP	PVC, BLACK
⑤	SCREW	PBT, BLACK
⑥	O-RING	EPDM RUBBER, BLACK

P/NO	L	T
SY-USB3-1-BK-WP(IP68)	1000mm	±50mm
SY-USB3-2-BK-WP(IP68)	2000mm	±50mm
SY-USB3-3-BK-WP(IP68)	3000mm	±80mm
SY-USB3-4-BK-WP(IP68)	4000mm	±80mm
SY-USB3-5-BK-WP(IP68)	5000mm	±80mm

ITEM.	CO. SY	S/N. SY-USB3-X-BK-WP
DR.	APPD. Mark 2024/10/23	CHKD.



Shiunn Yang Ent.Co.Ltd.
TEL: 29089890 <REP>
FAX: 29088679

FILESY-USB3-X-BK-WP	
SCALE /	
UNIT mm	SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------

1	2	3	4	5	6	7
---	---	---	---	---	---	---