ROHS Compliant

DATE	2024/10/23
Revision	D

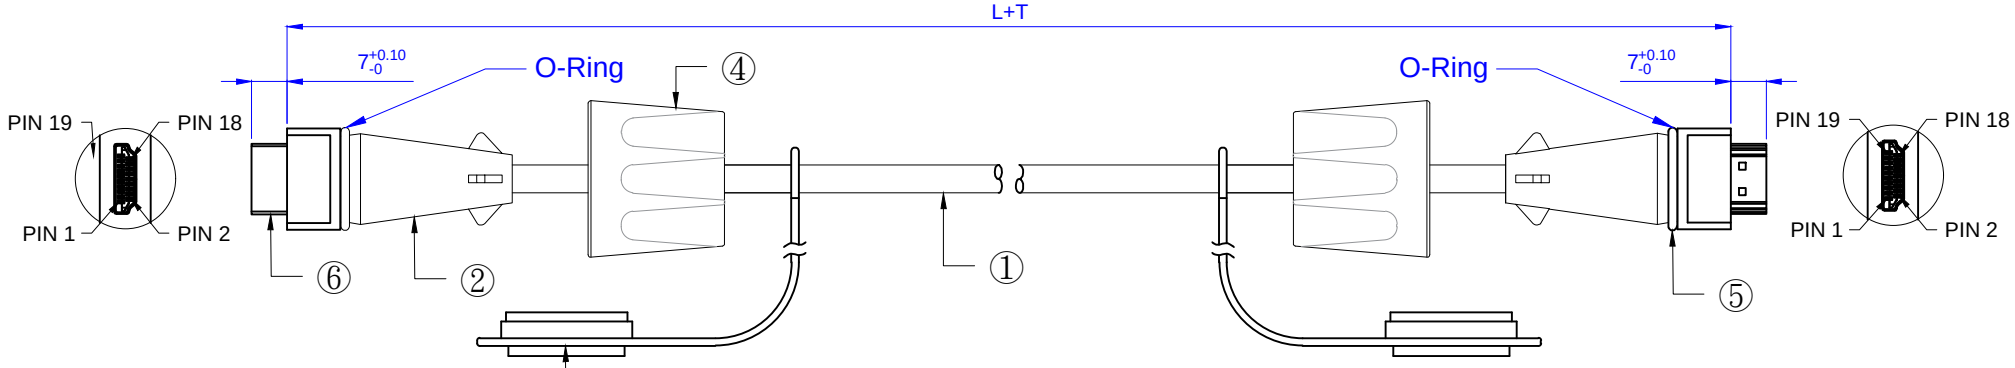

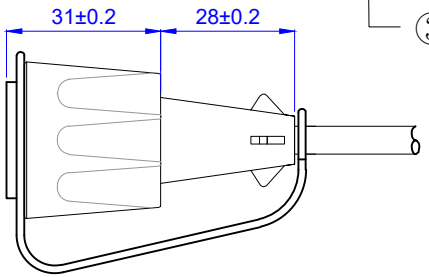

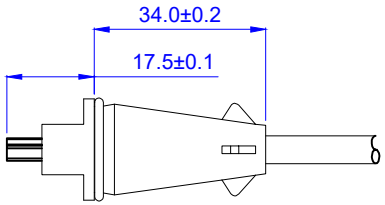

CONNECTION

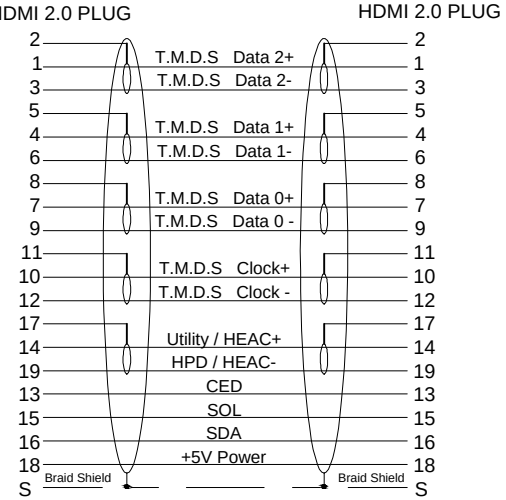

ELECTRIC TESTING
100% OPEN & SHORT TESTING.
INULATION RESISTANCE : 20 MΩ.
CONDUCTOR RESISTANCE : 3 Ω.
VOLTAGE : 300V DC/0.1S.

NOTE
HDMI 2.0

IP68
ACCORDING TO IEC 60529
Degrees of Protection Provided by Enclosures
6:Dust-tight
8:Protected from immersion in water for 60 minutes at a depth of 1.5 meter.

		MATERIAL
①	CABLE SPEC	HDMI CABLE {28#*5P+28#*4C+Filler+AL Mylar+Braid}*1C OD:7.3±0.15MM Black PVC Jacket
	PRINTED WHITE	HIGH SPEED HDMI R(logo) CABLE WITH ETHERNET E81280-D UL(Logo) AWM STYLE 20276 80°C 30V VW-1 CHING TAI(P/N:C19S0063)
②	HOOD	PVC, BLACK UL94V-0 (Operating Temperature Range -40°C to 85°C)
③	DUSTPROOF CAP	PVC, BLACK
④	SCREW	PBT, BLACK
⑤	O-RING	EPDM RUBBER, BLACK
⑥	HDMI	HDMI 2.0 Plug-Gold Plated

REV.	DESCRIPTION	ENG.	APPROVAL

P/NO.	L	T
SY-HDMI-3FT-BK-WP	915mm	±30mm
SY-HDMI-7FT-BK-WP	2130mm	±50mm
SY-HDMI-15FT-BK-WP	4570mm	±80mm

ITEM.	CO. SY	S/N. SY-HDMI-X-BK-WP
DR.	APPD. Mark 2024/10/23	CHKD.
		FILE. SY-HDMI-X-BK-WP
		SCALE /
		UNIT mm / SIZE A4

Shiunn Yang Ent.Co.Ltd.
TEL: 29089890 <REP>
FAX: 29088679