

ROHS Compliant




DATE 2022/08/02
Revision A

Features :

- T-568A/B Dual wiring
- RJ45 complies with FCC part 68 standard
- Contact Compatibility : Accommodates 22~24 AWG Solid.
- Jack insertion life >750 mating cycles
- Operating temperature : -10°C~+60°C
- Storage Temperature Range : -40°C~+68°C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max.0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V

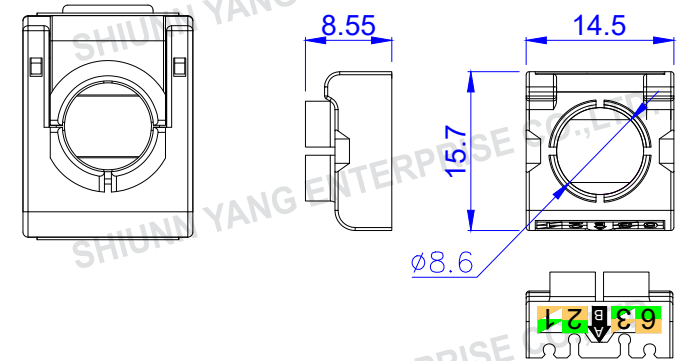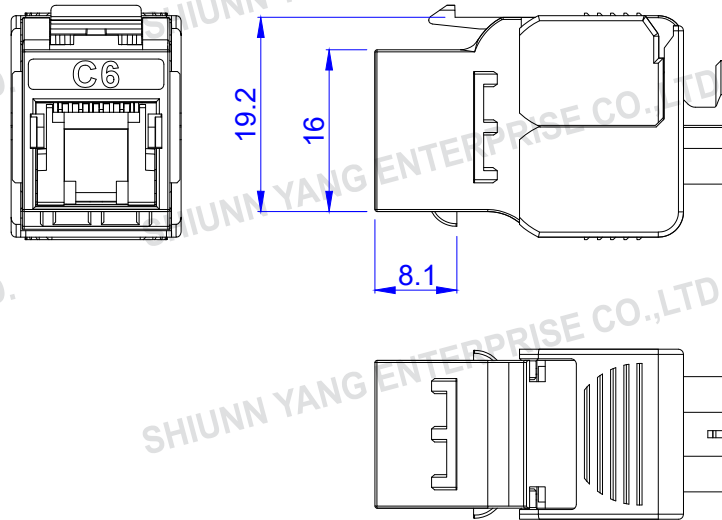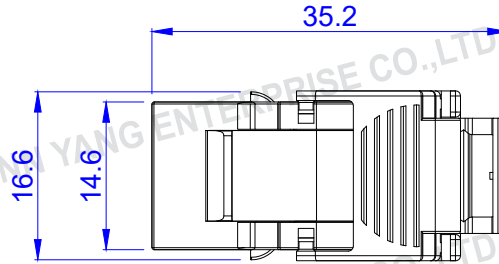

TOLERANCE

.XXX	0.10
.XX	0.25
.X	0.38

MATERIAL

CATEGORY	☐ CAT.5E ☒ CAT.6 ☐ CAT.6A ☐ OTHER _____
HOUSING	PC, UL94V-0, NICKEL SILVER ALLOY, ZINC ALLOY, NICKEL PLATED .
CONTACT	0.35mm THICKNESS PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	☐ 0.0762um/3u inch ☐ 0.15um/6u inch ☐ 0.38um/15u inch ☐ 0.76um/30u inch ☒ 1.27um/50u inch
COLOR	☐ WHITE ☐ BLACK ☐ GREEN ☐ BLUE ☐ YELLOW ☐ RED ☐ ORANGE ☐ IVORY ☐ OTHER _____
TYPE OF PRODUCT	☐ UNSHIELD ☒ SHIELD : ZINC ALLOY,NICKLE PLATED.

P/NO. SY504S-P6-D


ITEM. Keystone Jack	CO. SY	S/N. SY504S-P6-D
DR.	APPD. Sweet 2022/08/02	CHKD.



Shiunn Yang Ent.Co.Ltd.
TEL: 29089890 <REP>
FAX: 29088679

FILE. SY504S-P6-D

SCALE /



UNIT mm

SIZE A4

REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------

1

2

3

4

5

6

7